



■ SFP 自潤滑板 Oilless Flat Plate

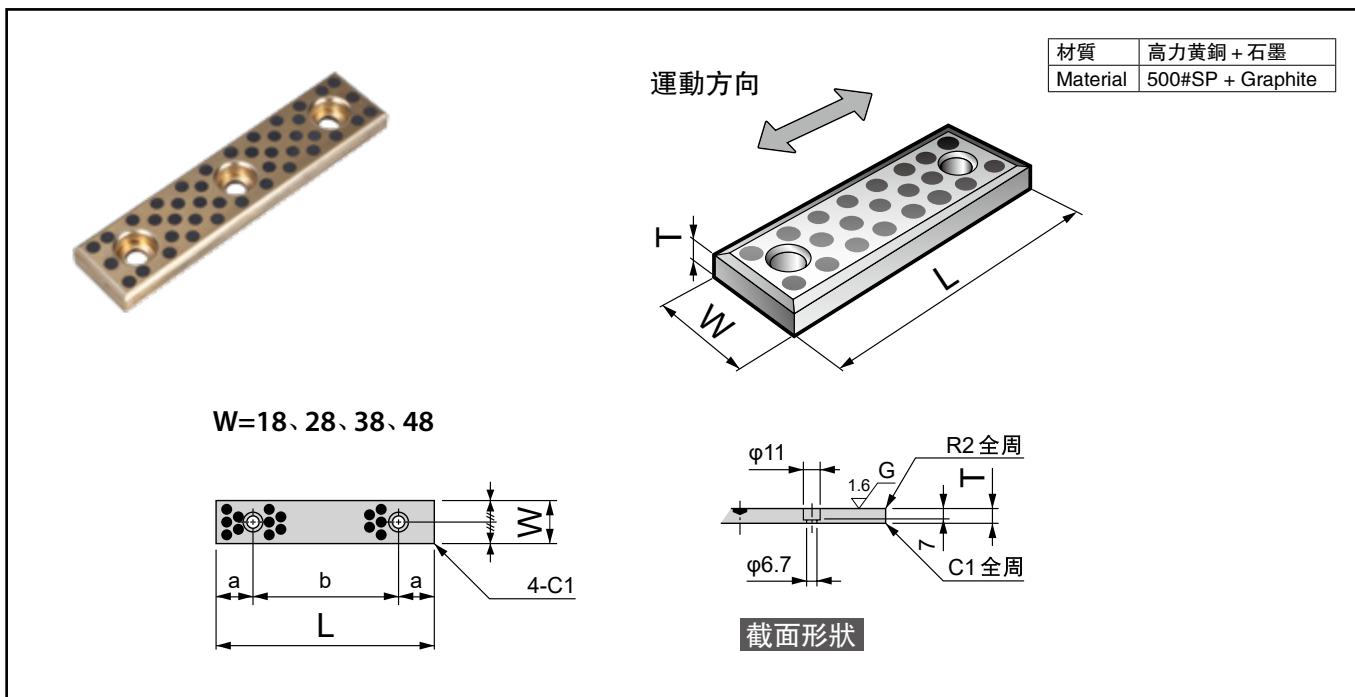

Unit(單位): mm


| Parts No. | 寬度 | 長度 | 厚度 | | 安裝孔間距 | | 安裝螺栓 | |
|-----------|----|-----|----|----------------|-------|-----|-----------|----|
| | W | L | T | 公差 | a | b | 種類 | 個數 |
| SFP-1875 | 18 | 75 | 10 | +0.04 +0.01 | 15 | 45 | M6 內六角 | 2 |
| SFP-18100 | 18 | 100 | 10 | +0.04 +0.01 | 25 | 50 | M6 內六角 | 2 |
| SFP-18125 | 18 | 125 | 10 | +0.04 +0.01 | 25 | 75 | M6 內六角 | 2 |
| SFP-18150 | 18 | 150 | 10 | +0.04 +0.01 | 25 | 100 | M6 內六角 | 2 |
| SFP-2875 | 28 | 75 | 10 | +0.04 +0.01 | 15 | 45 | M6 內六角 | 2 |
| SFP-28100 | 28 | 100 | 10 | +0.04 +0.01 | 25 | 50 | M6 內六角 | 2 |
| SFP-28125 | 28 | 125 | 10 | +0.04 +0.01 | 25 | 75 | M6 內六角 | 2 |
| SFP-28150 | 28 | 150 | 10 | +0.04 +0.01 | 25 | 100 | M6 內六角 | 2 |
| SFP-3875 | 38 | 75 | 10 | +0.04 +0.01 | 15 | 45 | M6 內六角 | 2 |
| SFP-38100 | 38 | 100 | 10 | +0.04 +0.01 | 25 | 50 | M6 內六角 | 2 |
| SFP-38125 | 38 | 125 | 10 | +0.04 +0.01 | 25 | 75 | M6 內六角 | 2 |
| SFP-38150 | 38 | 150 | 10 | +0.04 +0.01 | 25 | 100 | M6 內六角 | 2 |
| SFP-4875 | 48 | 75 | 10 | +0.04 +0.01 | 15 | 45 | M6 內六角 | 2 |
| SFP-48100 | 48 | 100 | 10 | +0.04 +0.01 | 25 | 50 | M6 內六角 | 2 |
| SFP-48125 | 48 | 125 | 10 | +0.04 +0.01 | 25 | 75 | M6 內六角 | 2 |
| SFP-48150 | 48 | 150 | 10 | +0.04 +0.01 | 25 | 100 | M6 內六角 | 2 |

■ SFP 自潤滑板 Oilless Flat Plate

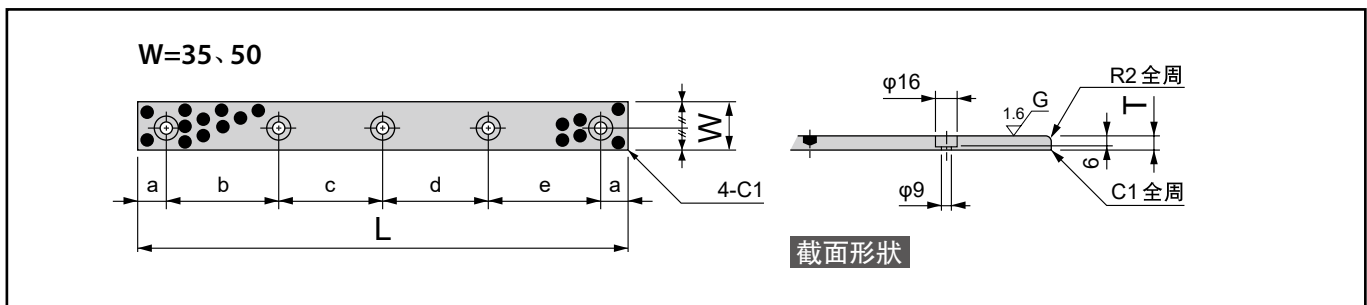

Unit(單位): mm

| Parts No. | 寬度 | 長度 | 厚度 | | 安裝孔間距 | | | | | 安裝螺栓 | |
|-----------|----|-----|----|--------|-------|----|----|----|----|---------|----|
| | W | L | T | 公差 | a | b | c | d | e | 種類 | 個數 |
| SFP-35100 | 35 | 100 | 10 | ±0.025 | 20 | 60 | - | - | - | M8 平頭螺釘 | 2 |
| SFP-35150 | 35 | 150 | 10 | ±0.025 | 20 | 55 | 55 | - | - | M8 平頭螺釘 | 3 |
| SFP-35200 | 35 | 200 | 10 | ±0.025 | 20 | 55 | 50 | 55 | - | M8 平頭螺釘 | 4 |
| SFP-35250 | 35 | 250 | 10 | ±0.025 | 20 | 70 | 70 | 70 | - | M8 平頭螺釘 | 4 |
| SFP-35300 | 35 | 300 | 10 | ±0.025 | 20 | 65 | 65 | 65 | 65 | M8 平頭螺釘 | 5 |
| SFP-35350 | 35 | 350 | 10 | ±0.025 | 20 | 80 | 75 | 75 | 80 | M8 平頭螺釘 | 5 |
| SFP-50100 | 50 | 100 | 10 | ±0.025 | 20 | 60 | - | - | - | M8 平頭螺釘 | 2 |
| SFP-50150 | 50 | 150 | 10 | ±0.025 | 20 | 55 | 55 | - | - | M8 平頭螺釘 | 3 |
| SFP-50200 | 50 | 200 | 10 | ±0.025 | 20 | 55 | 50 | 55 | - | M8 平頭螺釘 | 4 |
| SFP-50250 | 50 | 250 | 10 | ±0.025 | 20 | 70 | 70 | 70 | - | M8 平頭螺釘 | 4 |
| SFP-50300 | 50 | 300 | 10 | ±0.025 | 20 | 65 | 65 | 65 | 65 | M8 平頭螺釘 | 5 |
| SFP-50400 | 50 | 400 | 10 | ±0.025 | 20 | 90 | 90 | 90 | 90 | M8 平頭螺釘 | 5 |

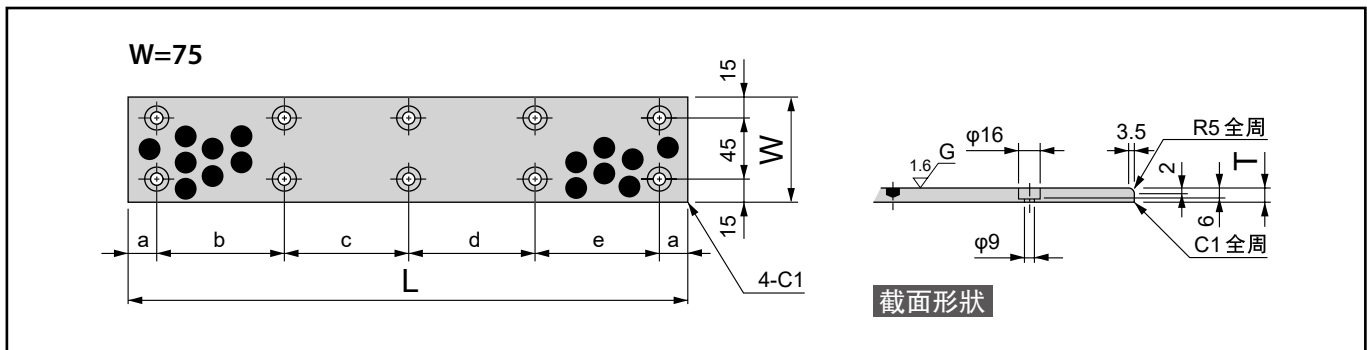

Unit(單位): mm

| Parts No. | 寬度 | 長度 | 厚度 | | 安裝孔間距 | | | | | 安裝螺栓 | |
|-----------|----|-----|----|--------|-------|-----|-----|-----|-----|---------|----|
| | W | L | T | 公差 | a | b | c | d | e | 種類 | 個數 |
| SFP-75150 | 75 | 150 | 10 | ±0.025 | 20 | 110 | - | - | - | M8 平頭螺釘 | 4 |
| SFP-75200 | 75 | 200 | 10 | ±0.025 | 20 | 80 | 80 | - | - | M8 平頭螺釘 | 6 |
| SFP-75250 | 75 | 250 | 10 | ±0.025 | 20 | 105 | 105 | - | - | M8 平頭螺釘 | 6 |
| SFP-75300 | 75 | 300 | 10 | ±0.025 | 20 | 85 | 90 | 85 | - | M8 平頭螺釘 | 8 |
| SFP-75400 | 75 | 400 | 10 | ±0.025 | 20 | 120 | 120 | 120 | - | M8 平頭螺釘 | 8 |
| SFP-75500 | 75 | 500 | 10 | ±0.025 | 20 | 115 | 115 | 115 | 115 | M8 平頭螺釘 | 80 |